


TRUE LOCK 4.5mm Tibia Straight Plates are indicated for fixation of tibia shaft fractures. They are also for use in fixation of periprosthetic fractures, osteopenic bone, and nonunions or malunions.

Tibia shaft fractures have taken the forefront of long bone fractures, which are the most common today with the advancement of technology and the increase in the number of people involved in sports activities. It accounts for about 15% of all fractures.

7 hole options between 6-12.

TRUE LOCK 4.5mm Tibia Straight Plates are made of Ti6Al4V ELI material (ASTM F136).

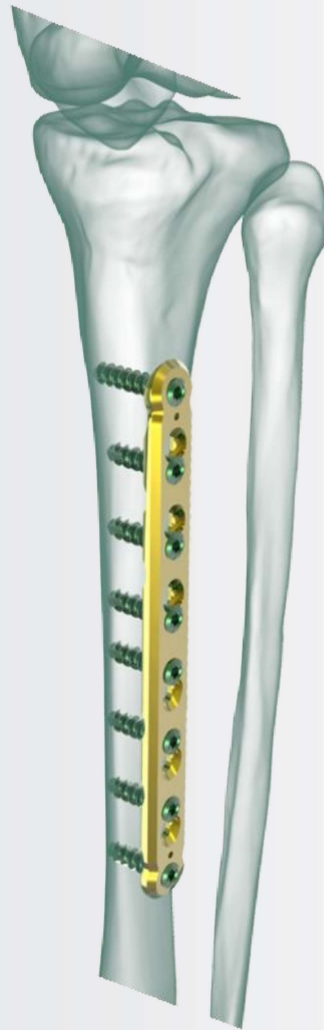


TRUE LOCK 4.5mm Tibia Straight Plate Features



The combi-hole provides flexibility of axial compression and locking capability throughout the length of the plate shaft.

Improved vascularization of the periost due to plate undercuts that reduce the plate-to-bone contact.

Kirschner wire holes accept Kirschner wires (up to 2.0 mm) to temporarily fix the plate to the tibia, to temporarily reduce articular fragments, and to confirm the location of the plate, relative to the tibia.

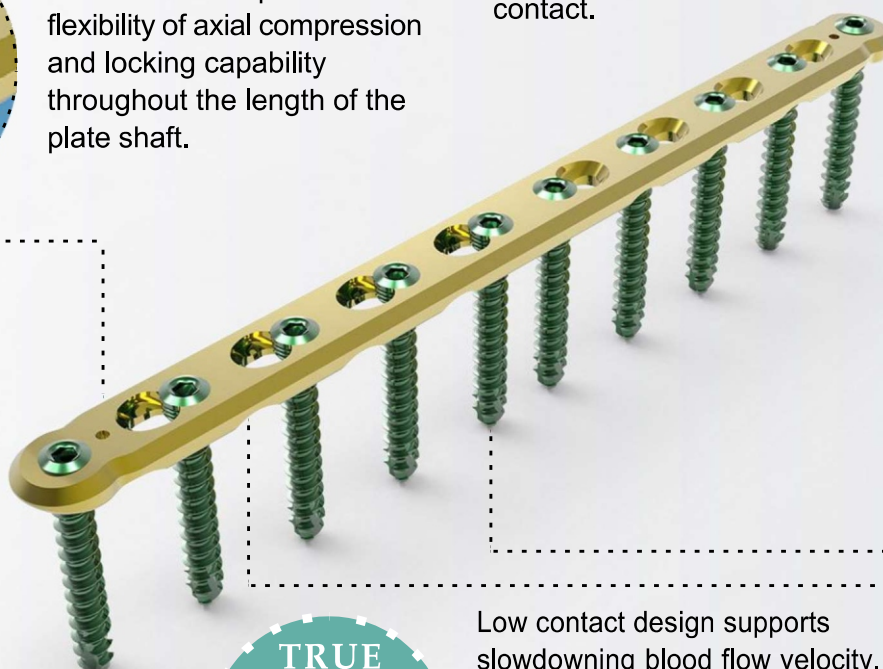

Locking the screw into the plate does not generate additional compression. Therefore, the periosteum will be protected and the blood supply to the bone preserved.


Low contact design supports slowing down blood flow velocity.




TRUE LOCK 4.5mm Tibia Straight Plate Screws Info

Reference Number:	Hole Count:	Length (mm)
201-11430-006	6 hole	115
201-11430-007	7 hole	140
201-11430-008	8 hole	165
201-11430-009	9 hole	190
201-11430-010	10 hole	210
201-11430-011	11 hole	235
201-11430-012	12 hole	260

4.5 mm Non-Locking Cortical Screw




4.5 mm Locking Cortical Screw



4,5 mm Locking Cannulated Cortical Screw



6,5 mm Non-Locking Cancellous Screw



6,5 mm Locking Cancellous Screw



6,5 mm Non-Locking Cannulated Cancellous Screw



6,5 mm Locking Cannulated Cancellous Screw

